

# Cascade tank

To separate solids from liquids in washing chamber and processing machines


KB-A-... / KB-U-...

## Machine Characteristics KB-A-...

- For connection to washing chamber to separate solids (e.g. lapping agent) before disposal of waste water into sewage

### Explanation

- 1 tank with 3 compartments
- 2 handle
- 3 cover
- 4 inlet
- 5 removable cascade walls
- 6 overflow
- 7 discharge
- 8 transport wheels

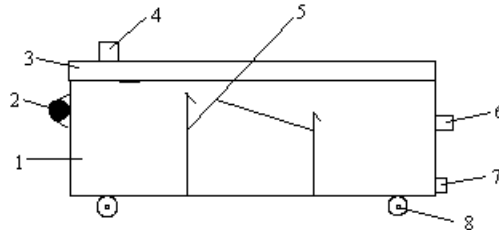


## Machine Characteristics KB-U-...

- For connection to processing machines (e.g. cutting disc) for supply of cooling lubricants (circulation) and separation of abraded materials

### Explanation

- 1 tank with 3 compartments
- 2 handle
- 3 cover
- 4 inlet
- 5 removable cascade walls
- 6 overflow
- 7 discharge
- 8 transport wheels

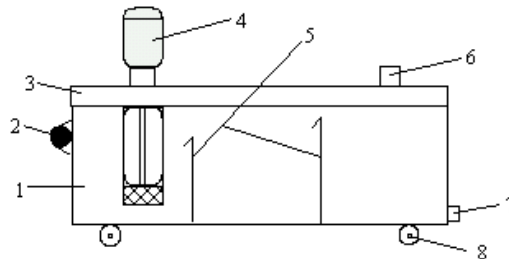

# Cascade tank

To separate solids from liquids in washing chamber and processing machines

KB-A-... / KB-U-...

## Technical Details

- Parts with media contact in corrosion resistant stainless steel or plastic
- On wheels mobile device
- Removable cover and 2 cascade walls

Typ	Filling volume in L	Dimensions (WxDxH) in mm	Pump output* in l/min	height in mm * (incl. pump)
...A - 40	40	360 x 720 x 380	-	-
...U - 40			65	580 mm
...A - 65	65	460 x 720 x 430	-	-
...U - 65			65	630 mm
...A - 90	90	460 x 920 x 430	-	-
...U - 90			65	630 mm
...A - 150	150	660 x 1120 x 430	-	-
...U - 150			65	630 mm

Other models are available on request.

